


KS/KSF through connectors with partition 10-500 mm<sup>2</sup>

# KSF300AM

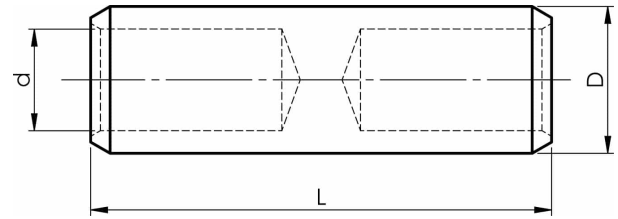

- Material: Cu 99.95%, tin plated Cu/Sn.
- With partition to prevent oil leakage.
- For stranded (class 2) and multi-stranded (class 5) Cu conductors, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.
- UL-approved, DNV approved.

## Examples of marking: 20 95F (Elpress logotype is included on the marking.)

20 = Die No. 95 = mm<sup>2</sup> F = type KSF for stranded and flexible conductors 111 = screen mm<sup>2</sup>

Uninsulated through connector for multi-stranded (class 5) and stranded (class 2) Cu conductors, 300 mm<sup>2</sup>. Used with Elpress certified systems V1300, V250.



Item number: **7303-103700**

EAN: **7393487078154**

d (mm): **24.5**

D (mm): **31,5**

L (mm): **88**

s (mm) - strip length: **37**

AWG/MCM Cu: **550 MCM**

mm<sup>2</sup> Cu: **300**